

LFP1000S自吸隔膜增压泵系列


LFP1000S SELF-PRIMING DIAPHRAGM BOOSTER PUMP SERIES

产品特点/PRODUCT FEATURES

- 符合ROHS、CE、CQC认证；
- Compliant with ROHS & CE & CQC certification
- 涉水部件均符合食品级要求；
- The wet parts complies with food grade requirements
- 承压部件采用高强度塑料与金属材质；
- High strength plastic and metal pressure components
- 密封部件采用进口材质；
- The materials of sealing parts are all imported
- 低噪音、低振动、强动力直流电机配置；
- Equipped with strong impetus DC motor with low noise, low vibration
- 电气、密封、增压等性能生产流程全检控制。
- Whole process quality control in electrical, sealing and water producing
- 自吸性能达3米以上。
- The Self-priming performance of more than 3 m



安装尺寸/MOUNTING DIMENSIONS(mm)

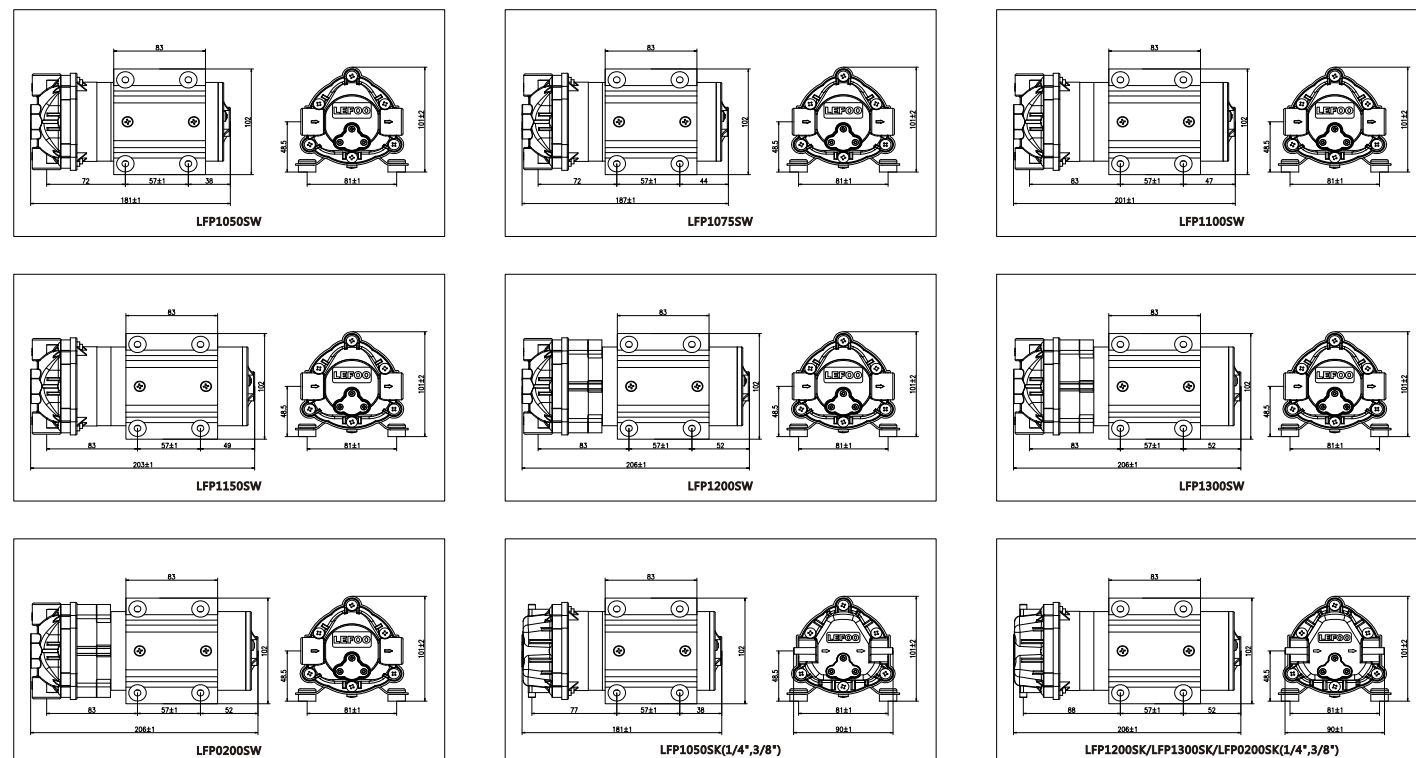

产品参数/PRODUCT PARAMETERS

型号 Model	LFP1050S	LFP1075S	LFP1100S	LFP1150S
额定电压 Nominal voltage	24VDC	24VDC	24VDC	24VDC
接口方式 Interface way	3/8"NPT、1/4"、3/8"	3/8"NPT、1/4"、3/8"	3/8"NPT、1/4"、3/8"	3/8"NPT、1/4"、3/8"
进水压力 Inlet pressure	0MPa	0MPa	0MPa	0MPa
工作压力 Working pressure	0.5MPa	0.5MPa	0.5MPa	0.5MPa
工作电流 Working current	≤1.2A	≤1.3A	≤1.6A	≤2.1A
工作流量 Working flow	≥650mL/min	≥850mL/min	≥1050mL/min	≥1450mL/min
开放流量 Open flow	≥1100mL/min	≥1300mL/min	≥1400mL/min	≥1800mL/min
封堵压力 Bypass pressure	0.8-1.0MPa	0.8-1.0MPa	0.8-1.0MPa	0.8-1.0MPa
最大电流 Maximum current	1.55A	1.8A	2.1A	2.8A
自吸高度 Self-priming height	>3m	>3m	>3m	>3m

型号 Model	LFP1200S	LFP1300S	LFP2000S
额定电压 Nominal voltage	24VDC	24VDC	12VDC
接口方式 Interface way	3/8"NPT、1/4"、3/8"	3/8"NPT、1/4"、3/8"	3/8"NPT、1/4"、3/8"
进水压力 Inlet pressure	0MPa	0MPa	0MPa
工作压力 Working pressure	0.5MPa	0.5MPa	0.5MPa
工作电流 Working current	≤2.5A	≤3.5A	≤5.0A
工作流量 Working flow	≥1800mL/min	≥2600mL/min	≥1800mL/min
开放流量 Open flow	≥2400mL/min	≥3200mL/min	≥2400mL/min
封堵压力 Bypass pressure	0.8-1.0MPa	0.8-1.0MPa	0.8-1.0MPa
最大电流 Maximum current	3.3A	4.5A	6.5A
自吸高度 Self-priming height	>3m	>3m	>3m