


产品特点 PRODUCT FEATURES

- 符合ROHS、CE、CQC认证
Compliant with RoHS, CE & CQC certification.
- 涉水部件均符合食品级要求
The wet parts complies with food grade requirements.
- 承压部件采用高强度塑料与金属材料
High strength plastic and metal pressure components.
- 密封部件采用进口材质
The materials of sealing parts are all imported.

- 低噪音、低振动、强动力直流电机配置
Equipped with strong impetus DC motor with low noise, low vibration.
- 电气、密封、增压等性能生产流程全检控制
Whole process quality control in electrical, sealing and water producing.
- 大通量小体积、压力稳定、寿命长。
Large flux small volume, stable pressure, long life.

流量曲线 FLOW CURVE

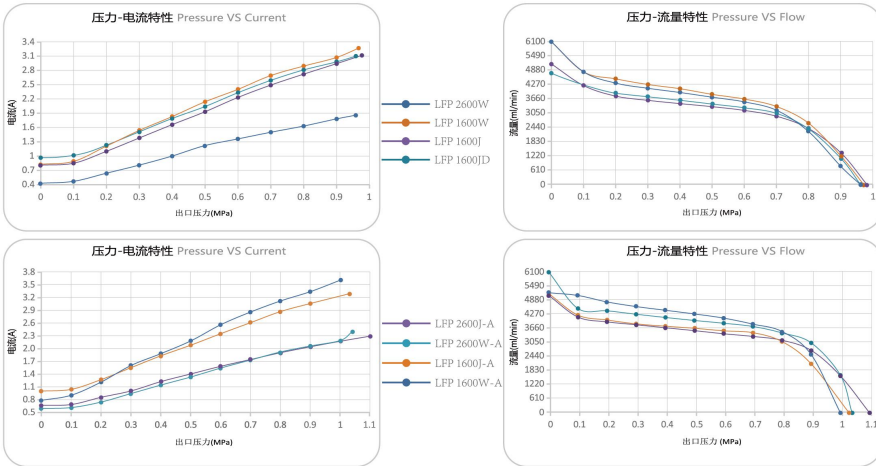

产品参数 PRODUCT PARAMETERS

型号 Model	LFP1600J/LFP1600JD	LFP1600W	LFP2600W	LFP1600J-A	LFP1600W-A	LFP2600J-A	LFP2600W-A				
额定电压 Voltage	24V DC		36V DC		24V DC		36V DC				
进水压力 Inlet pressure	0.2MPa										
工作压力 Working pressure	0.5MPa	0.5MPa	0.7MPa	0.5MPa	0.7MPa	0.7MPa	0.5MPa	0.7MPa			
工作电流 Working current	≤2.8A	≤3.0A	≤4.0A	≤1.9A	≤2.2A	≤3.3A	≤4.0A	≤4.5A	≤2.2A	≤2.2A	≤2.6A
工作流量 Working flow	≥3200ml/min	≥3600ml/min	≥3200ml/min	≥3600ml/min	≥3200ml/min	≥3200ml/min	≥4000ml/min	≥3500ml/min	≥3200ml/min	≥4000ml/min	≥3500ml/min
开放流量 Open flow	≥4500ml/min			≥6000ml/min		≥4500ml/min	≥6000ml/min		≥4500ml/min		≥6000ml/min
封堵压力 Bypass pressure	0.85~1.05MPa										
最大电流 Maximum current	≤4.0A	≤4.5A	≤2.8A	≤4.3A	≤5.0A	≤2.5A	≤3.2A				
接口方式 Connection	NPT3/8螺纹 3/8"NPT		NPT3/8双0螺纹 3/8"NPT"0"		3分U型内插 3/8" Top female quick connector		3分内插 3/8" Side female quick connector				

安装尺寸 MOUNTING DIMENSIONS(mm)

